

EclPendant VW

200W Variable White innovative pendant light



VERSIONS

Code	Housing
ECLPENDANTVWBK	Black
ECLPENDANTVWWH	White

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 200W Variable White LED
- Source CCT: 2'700K - 6'500KK
- Luminous flux: (2'700K) 9'919 lm; (6'500K) 12'487 lm; (FULL) 14'571
- Lux: (2'700K) 1'956 lx; (6'500K) 2'529 lx; (FULL) 2'933lx @ 5 m
- CRI: 95,9 @2'700K; 96,3 @6'500K; 95,1 @ full
- R9: 95 @2'700K; 95 @6'500K; 79,9 @ full
- TLCI: 97 @2'700K; 96 @6'500K; 97 @ full
- TM30 Rf: 95,2 @2'700K; 90,8 @6'500K; 92,6 @ full
- TM30 Rg: 104,2 @2'700K; 100,4 @6'500K; 104 @ full
- Source life expectancy: > 50.000 hrs (L70B10 @Ta 25° C / 77° F)

OPTICS

- Beam angle: 20°
- Field angle: 40°
- Lens diameter: 157mm / 6.18"
- Lens type: fresnel lens
- Other: see available accessories

COLOUR SYSTEM

- Colour mixing: tunable white
- CCT: linear CCT control
- Macros: built-in white presets

DYNAMIC EFFECTS

- Static mode: selection of static dimmer and color temperature
- Manual mode: manual adjustment of dimmer and strobe
- Auto mode: built-in programs with execution speed adjustment

CONTROL

- Supported Protocols: DALI Type8, DMX512, RDM, CRMX
- DMX channels: 1 / 2 / 5 / 9 / 13ch
- RDM: for remote addressing and parameter configuration
- Display: Graphic User Interface
- Other: 16bit control of dimmer and colour

ELECTRONICS

- Dimmer: linear 0 - 100% electronic dimmer
- Dimmer curves: 4 selectable dimming modes available
- Strobe / shutter: 1-30 Hz, electronic
- Selectable PWM: 600 to 40000 Hz (selectable steps)
- Firmware upgrade: via DMX with UPBOXPRO/UPBOX1 (not included)

The **EclPendant VW** is a beautifully designed house light packed with high-performing technology that makes any venue well-lit whilst staying eco-friendly.

This innovative series of pendant lights come with a full range of optics, accessories, mounting options and control.

The **EclPendant VW** has a 200-Watt LED source Variable White that have high-quality light output, a consistent colour temperature and unmatched durability.

Several advanced user settings are available from the unit's on-board GUI and control protocols like DALI, DMX + RDM and Wireless DMX (CRMX + W-DMX).

The **EclPendant VW** was made for several uses - its mounting options include pendant, surface, stem, wall mount, adjustable bracket, and recessed. It's also possible to wire the **EclPendant VW** series directly to mains (100-240AC or 48V DC) and DMX or DALI through terminal blocks or feed power and DMX using the TrueOne and DMX connections.

The fixture has a wide range of optics and accessories available, with an uncompromising approach to flexibility and precision. All the optics are easily changeable on-site, providing a hassle-free user experience. The **EclPendant VW** has a fan-free thermal design and delivers a powerful and consistent lumen output over a long lifespan.

NOTE: the hanging bracket does not come with the product

MAIN FEATURES

- 200W LED source power, Variable White with passive cooling
- AC or DC power input. Control via DALI, DMX, RDM, Wireless DMX (CRMX+W-DMX)
- Extensive mounting option possibilities, optics and accessories are all easily changeable

CONNECTIONS

- Power connection: screw terminal block, Neutrik powerCON TRUE1 IN/OUT connectors
- Signal connection: screw terminal block, Amphenol XLR 5p IN/OUT connectors
- Wireless Connection: integrated LumenRadio TiMo FX RDM - CRMX and W-DMX compatible
- Low Voltage DC connector: DC 48V through screw terminal block

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Low Voltage DC mains: DC 48V for emergency light use
- Max power consumption (230V): 225W
- Output (at 230V): 10 units on a single power line
- Standby power: 34,2 W
- Power factor: > 0,95

PHYSICAL

- IP rating: IP20
- Cooling: fan-free with natural convection
- Housing: Sturdy die-cast aluminium body
- Finish: black (RAL 9004) or white (RAL 9010)
- Operating temperature: Ta -10 to +45 °C (+14 to +113 °F)
- Dimensions (WxHxD): 202x392x202mm / 7.95"x15.43"x7.95"
- Weight: 7,3kg / 16.09lbs

INSTALLATION

- Suspension and fixing: bracket for hanging and floor positioning (optional)

CERTIFICATIONS / REPORTS

- Compliance: CE, RCM, cTUVus

BOX CONTENT

- 1 x ECLPENDANTVW
- 1 x 1,5 meters 3G1,5mmq power cable (BARE END - SEETRONIC POWERCON TRUE1 IP65 power connector)
- 1 x User Manual
- NOTE:** no hanging bracket ECLPENDHGBRK on board to the fixture


ACCESSORIES & RELATED PRODUCTS

- ECLPENDLENS20/40/60 ECLPENDANT series lens 20°/40°/60°
- ECLPENDHGBRKBK/WH Hanging bracket for ECLPENDANT series, black/white housing
- ECLPENDRECKITBK/WH Ceiling recessed kit for ECLPENDANT series, black/white housing
- ECLPENDHSNOOTBK/WH Half snoot for ECLPENDANT series, black/white housing
- ECLPENDFSNOOTBK/WH Full snoot for ECLPENDANT series, black/white housing
- ECLPENDHLOUVBK/WH Honeycomb louvre for ECLPENDANT series, black/white housing
- ECLPENDCLOUVBK/WH Concentric louvre for ECLPENDANT series, black/white housing
- ECLPENDWALLBRKBK/WH Wall mounting bracket for ECLPENDANT and ECLPENDANTJR series, black/white housing
- ECLPENDCEILKITBK/WH Ceiling adapter kit for ECLPENDANT series, black/white housing


- TOUR53415L03 Dmx cable HC5340. CANC5MXX XLR 5p->CANC5FXX XLR (f) 5p, L.3m
- C6002B Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black
- RSR0630B Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black
- 9533FXWL03 Ass. 3x2.5mm TH07 cable, SHUKO plug, MENAC3FXW socket, L.3m
- 9513FXWL03 Ass. 3x2.5mm TH07 cable, 16A 3p 230V CEE plug, MENAC3FXW socket, L.3 m
- 958225L03 3x2.5mm TH07 Cable, 16A 3p PwCon MXW, 16A 3p PwCon FXW, L. 3m
- UPBOXPRO Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector

PRESET FULL ON

Beam angle 50%:

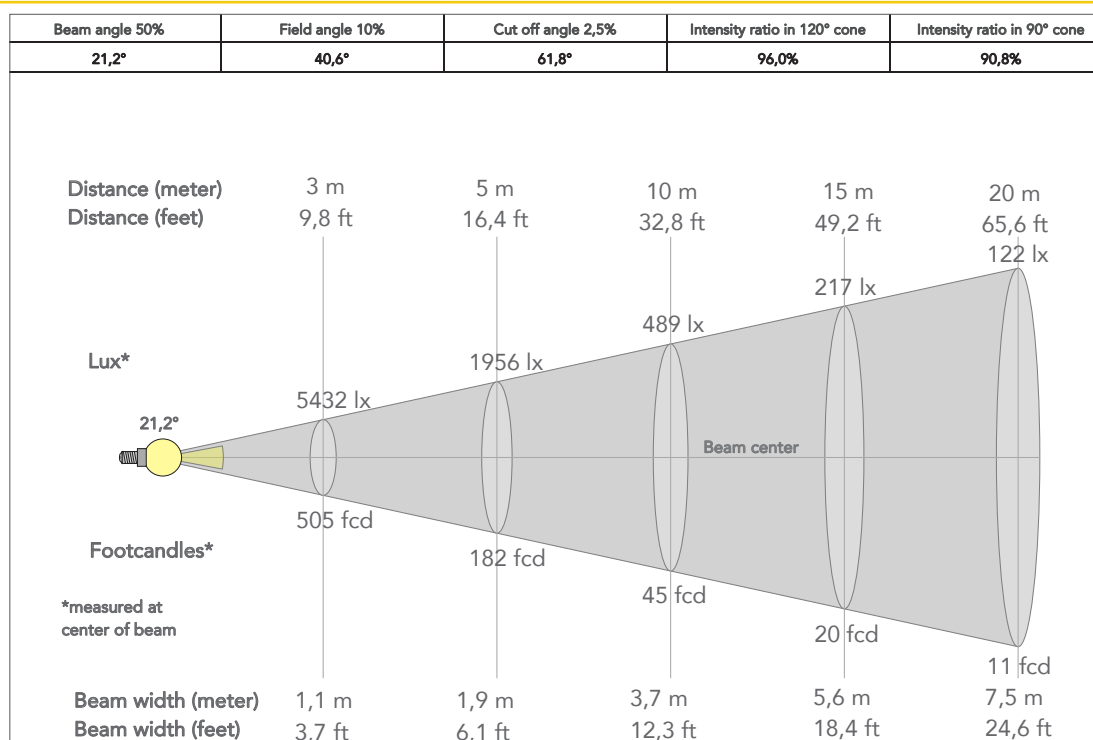

TECHICAL DRAWINGS

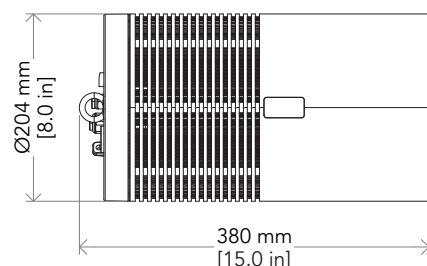

CERTIFICATIONS / APPROVALS



Conforms to UL STD. 1573
 Certified to CSA STD: C22.2 NO. 166

Visit our website
 for specifications and
 tech documentations



MUSIC & LIGHTS S.r.l.

Via A. Olivetti, sn
 04026 - Minturno (LT) ITALY

info@prolights.it
 Tel: +39 0771 72190

prolights.it
 VAT No. IT 02057590594